
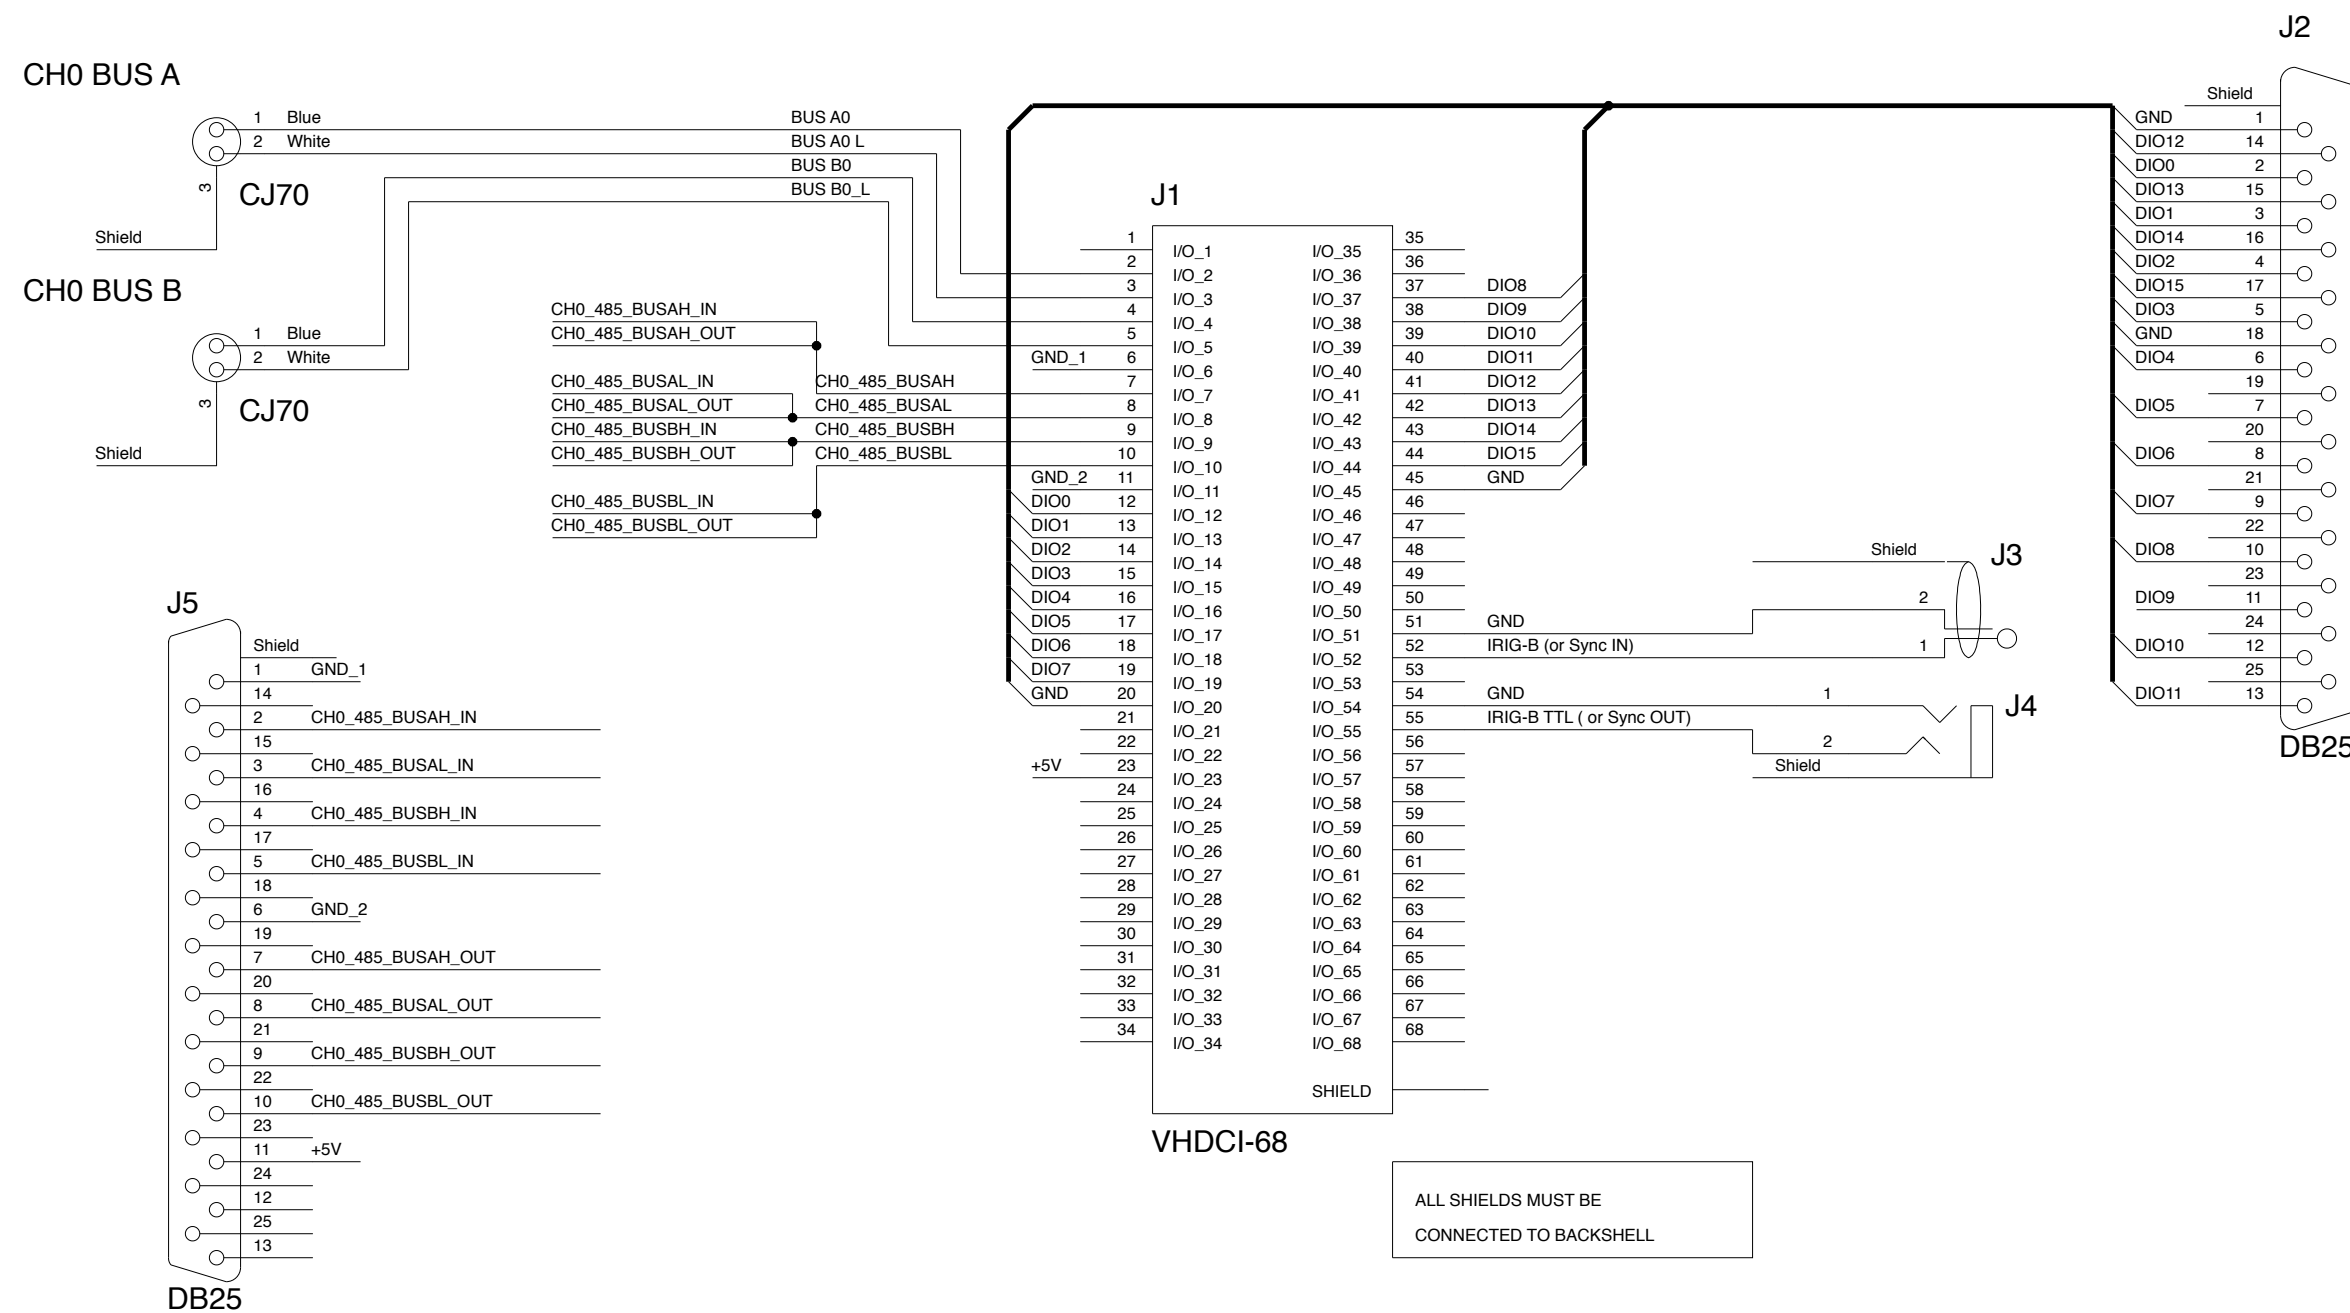


MAX-AC-40315

Single interface IPM-1553-MRT cable for PXI/PCI-400-2 card including two 1.5m (60") cables with CJ70 tri-axial connector, two 30cm (12") TRS connectors for IRIG-B AM and IRIG-B TTL (or SYNC IN and SYNC OUT) and two 1.5m (60") cables with DB-25 female connector for I/O triggers and Enhanced Bit Rate (EBR) interface.

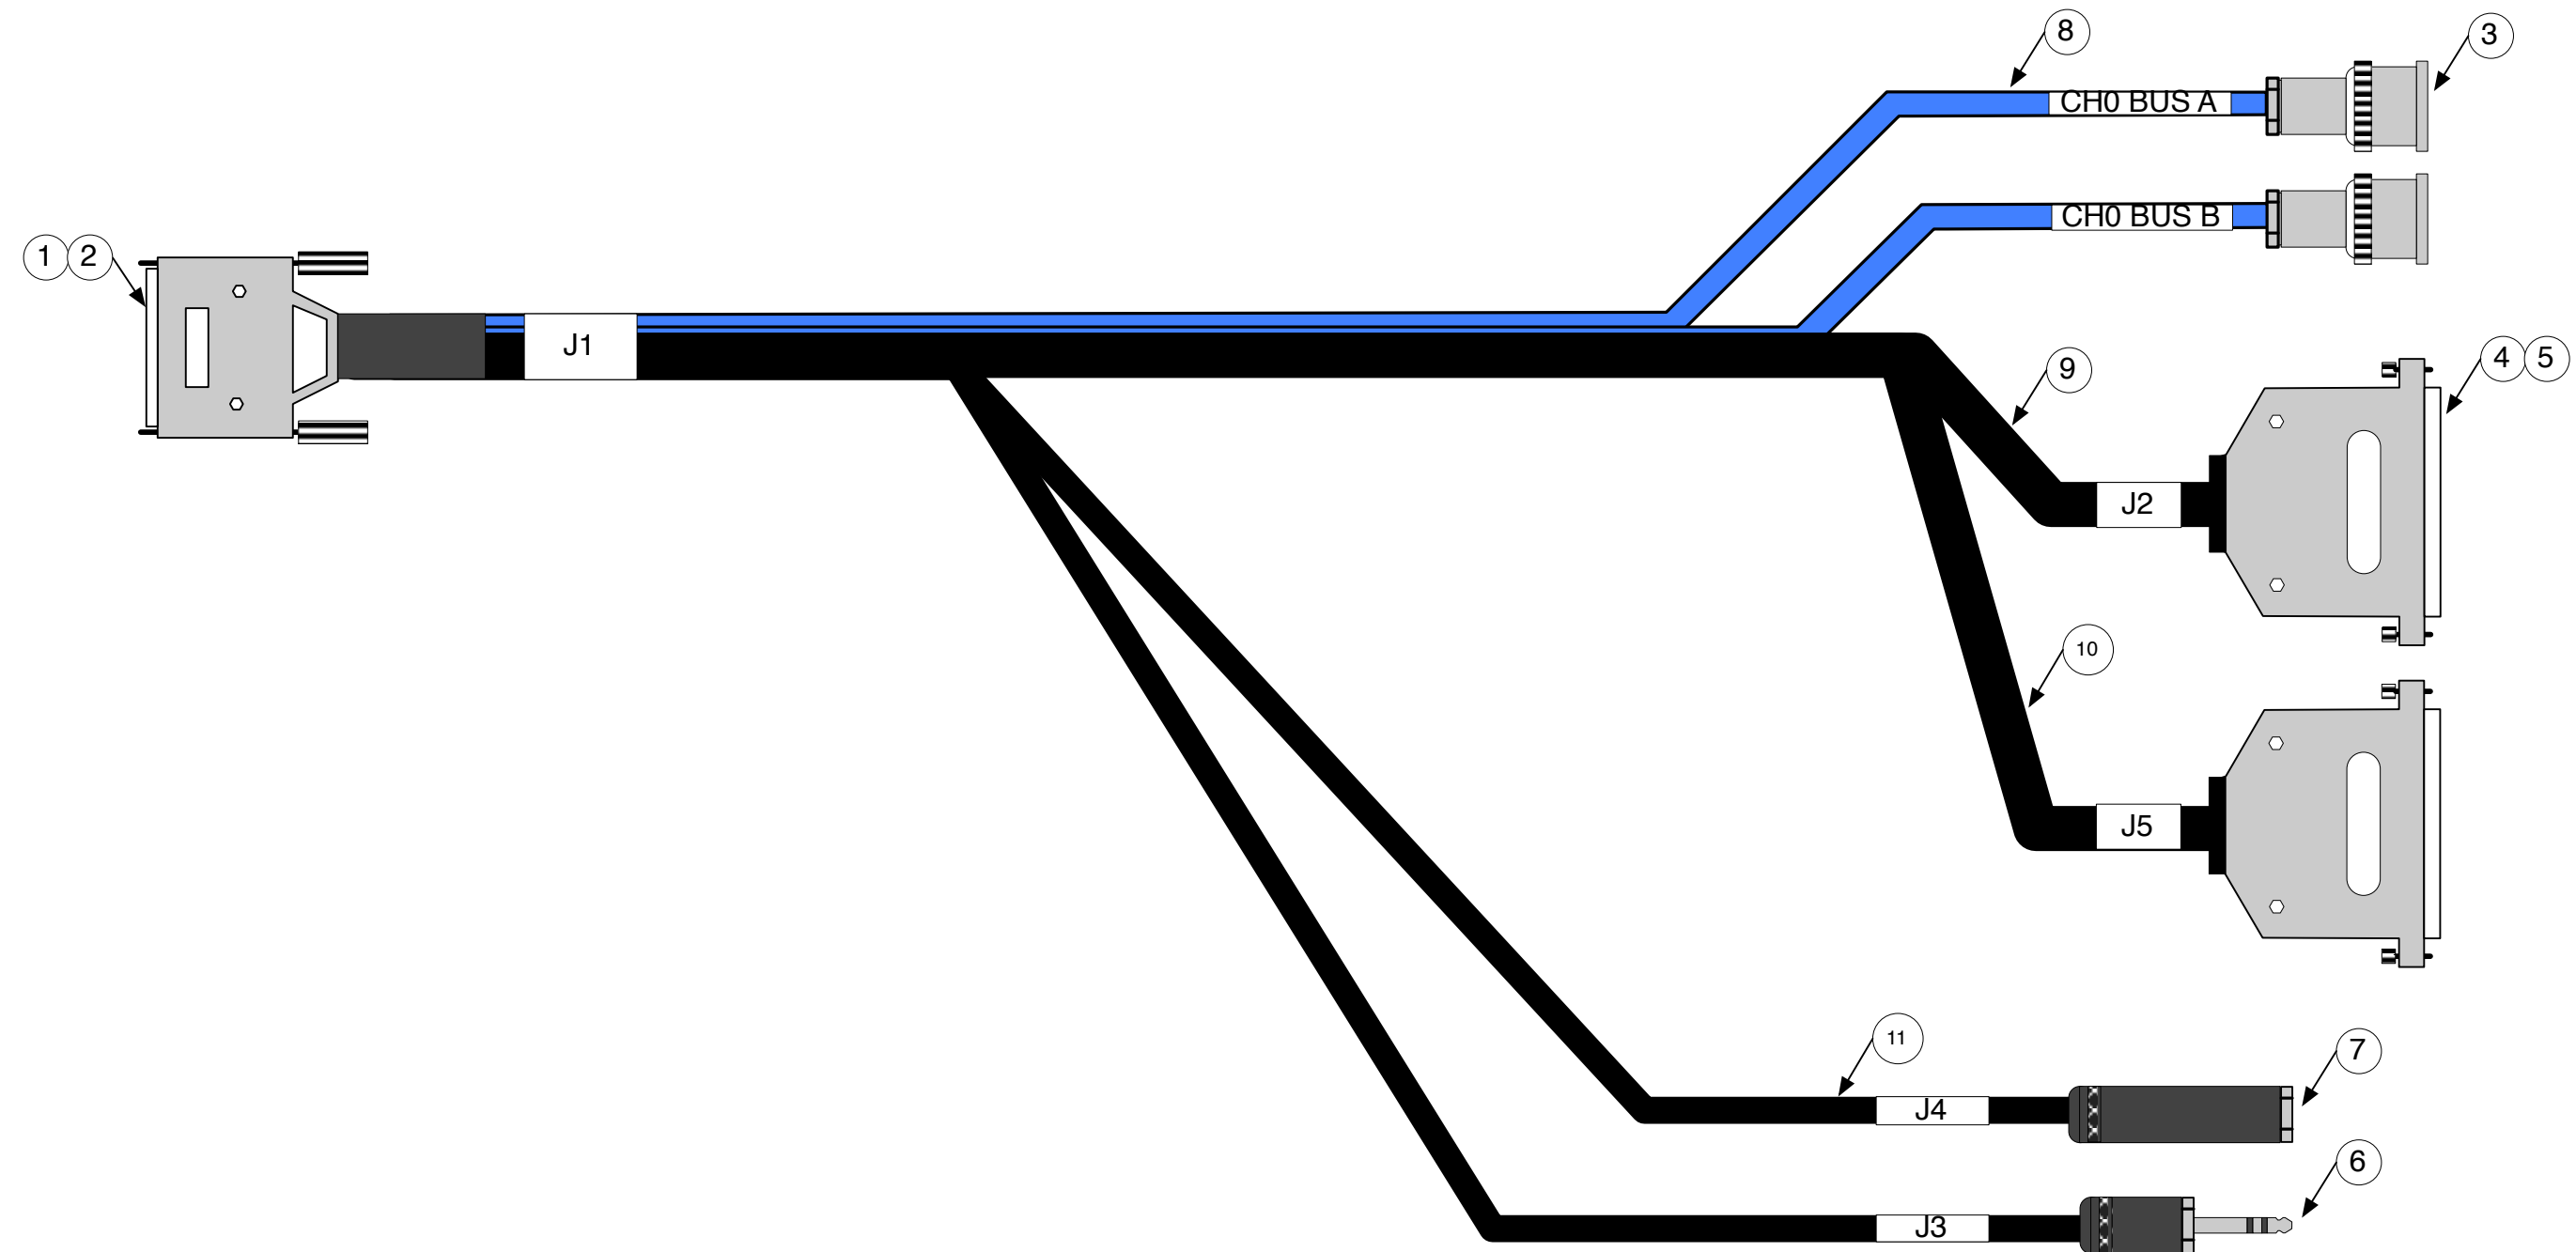

ALL SHIELDS MUST BE CONNECTED TO BACKSHELL

Revision	Changes history
2.2	Twinax cable length is now 150 cm (60") instead of 30 cm (12")
2.1	Official release

REVISION 2.2

#	Qty	Description
1	1	Connector VHDCI 68 pins 0.8mm
2	1	VHDCI Cover
3	2	MIL-STD-1553 cable plug
4	2	Connector D-SUB-25 Female
5	2	Backshell with Thumb Screws #4-40
6	1	3.5mm plug 3-pole, Gold plated contacts
7	1	3.5mm jack 3-pole, Gold plated contacts
8	2x 150 cm	MIL-STD-1553 twinax cable with shield
9	1x 150 cm	DB-25 cable with shield
10	1x 150 cm	EBR cable with Zo = 100 Ohm
11	2x 30 cm	Multiconductor cable with shield