

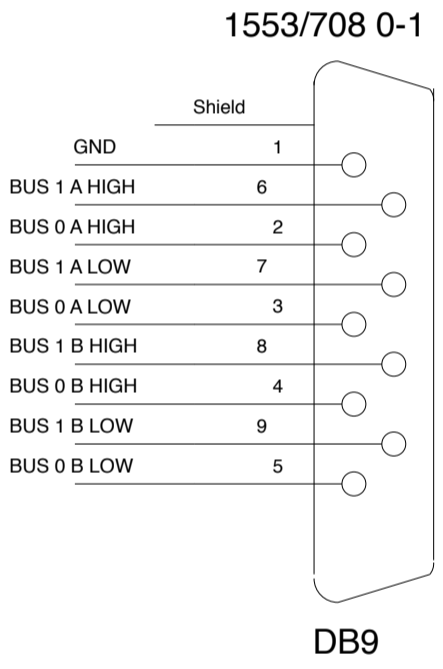


MAX-AC-40509

Dual interface MIL-STD-1553 cable for FlexMulti devices including four 1.5m (60") cables with PL75 tri-axial connectors

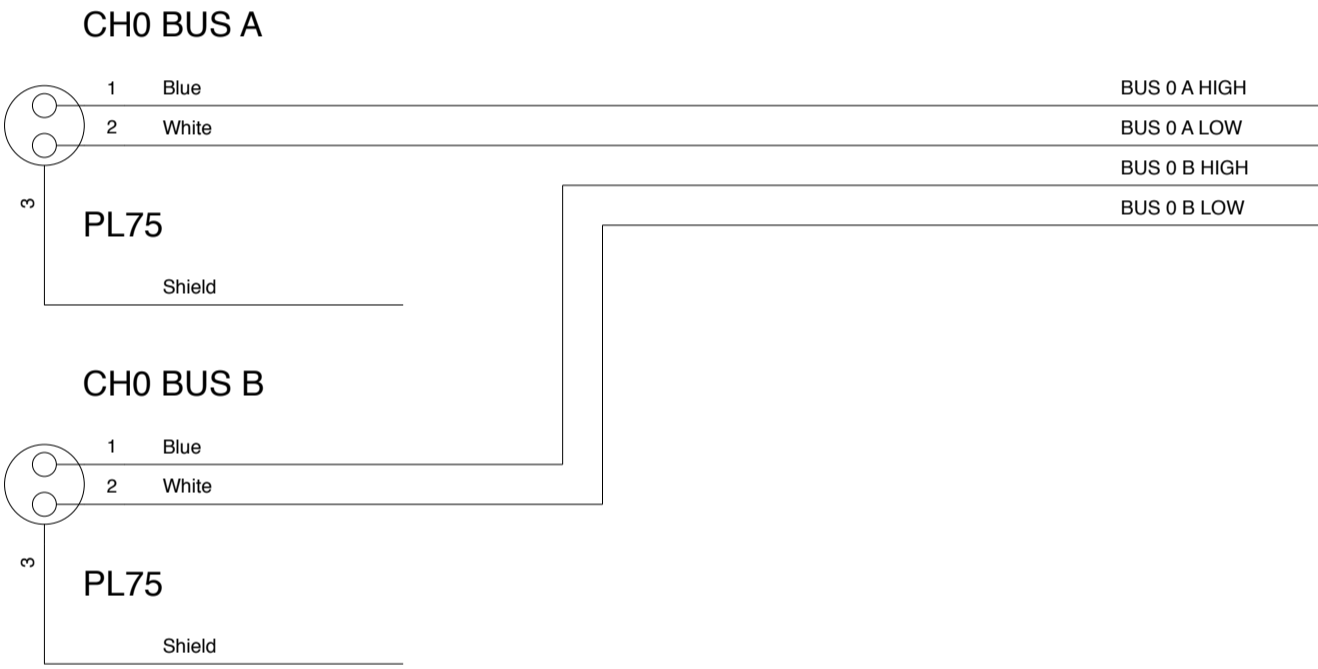

ALL SHIELDS MUST BE
CONNECTED TO BACKSHELL

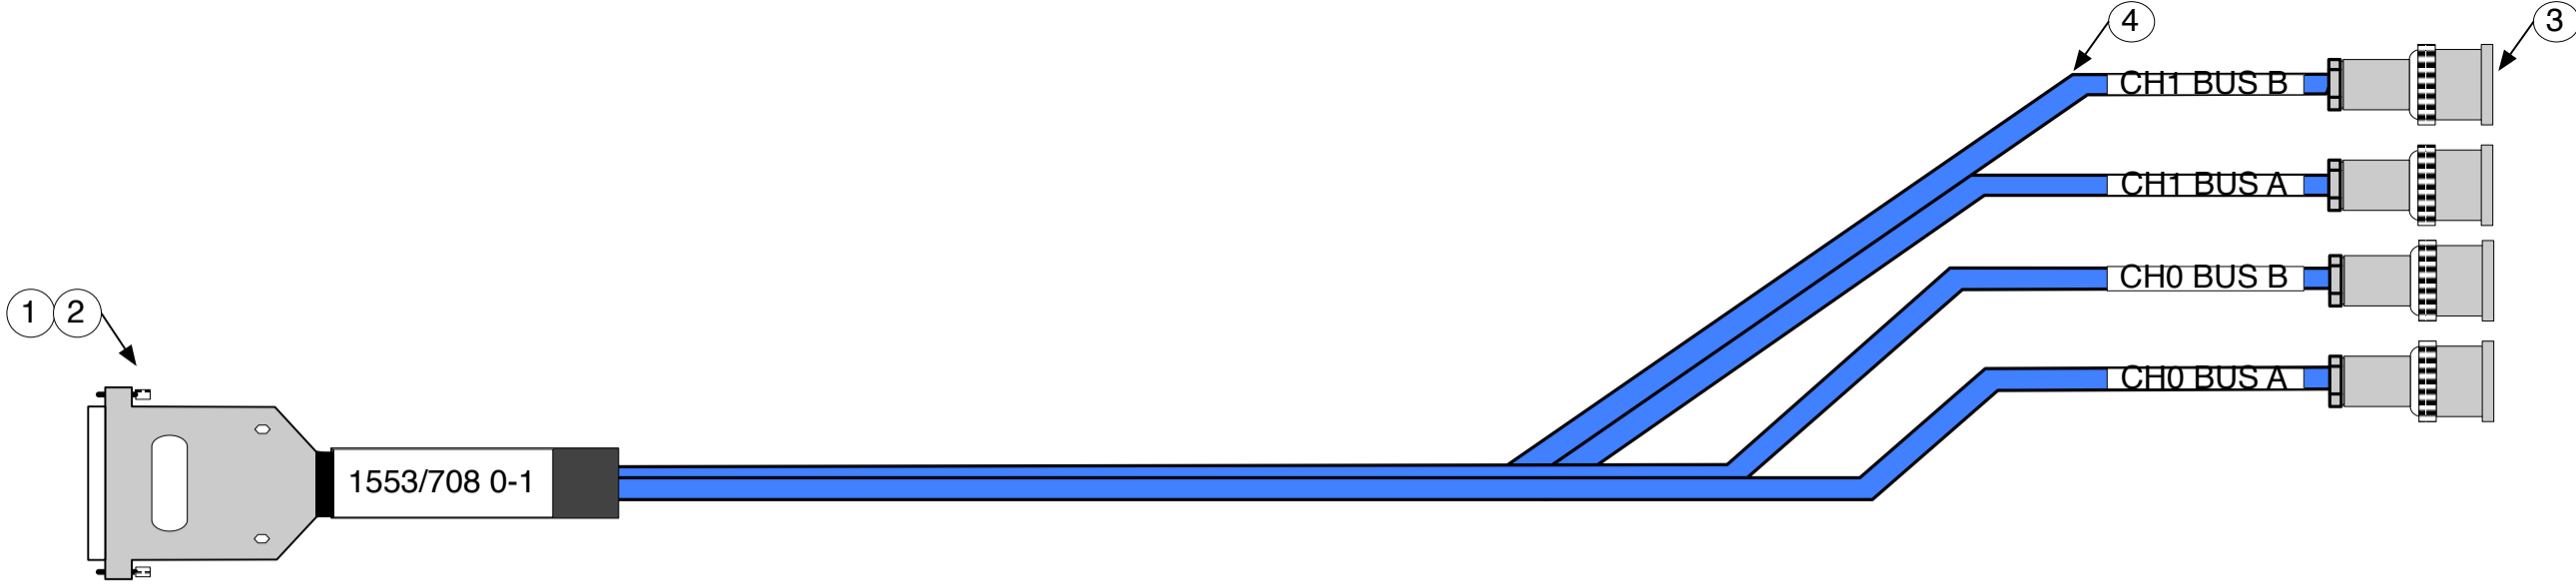

Revision	Changes history
1.0	Official release

REVISION 1.0

#	Qty	Description
1	1	Connector D-SUB-9 Male
2	1	DSUB9 Metal Backshell with Screws #4-40
3	4	MIL-STD-1553 tri-axial cable plug
4	4x 150 cm	MIL-STD-1553 twinax cable with shield